

室内HID电器箱-A箱  
HID Gear Box for Indoor Lighting




HID户内照明电器箱体积小、性能优越、稳定、寿命长。配电箱是由极高品质的电器配件组合，产品出厂前经过严格的安全及性能检测。使用环境温度为 -25℃ ~ 50℃，外壳采用电解铁板经喷塑处理，具有非常强的防锈能力，外壳上带有可维护的保险装置有耐高温、高压的引线输出和具有较强耐温的电源引入线，使用方便、可靠。

HID gearbox for indoor lighting features:

- Small size;
- Excellent stable performance, long service life ;
- Assembled by high quality components and parts;
- Passed strict safety and performance tests before shipping;
- Operating temperature: -25 °C ~ 50 °C;
- Anodizing iron casing and plastic spurts coating for anti-corrosion;
- Easy to maintain with fuses on case;
- Output leads with high heat and high voltage resistance, input leads for power supply with high heat resistance;
- Easy to use and reliable.

产品尺寸图  
size

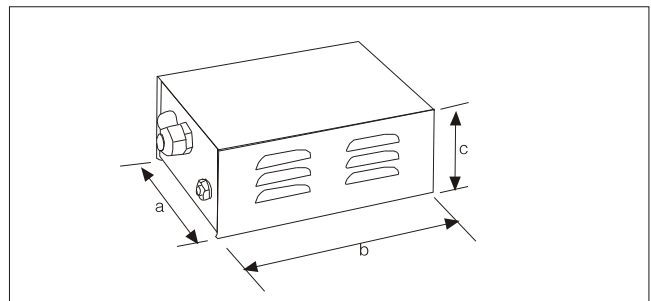

技术参数 data sheet

Ballast						Lamp				
型号 Model	产品代码 Code	电源电压 Supply voltage (v/Hz)	输入电流 input current (A)	功率因数 power factor cos φ	产品尺寸 Size(mm)	灯泡类型 bulb type	灯管电流(A) tube current	灯管功率(W) tube power		
					a b c					
HQBN-35L/A	2420202006	220V 50Hz	0.217	0.9	131 197 72	HPS/MH	0.53	35		
HQBN-50L/A	2420203001	220V 50Hz	0.298	0.9	131 197 72	HPS/MH	0.76	50		
HQBN-70L/A	2420204009	220V 50Hz	0.419	0.9	131 197 72	HPS/MH	0.98	70		
HQBN-100L/A	2420206003	220V 50Hz	0.576	0.9	131 197 72	HPS/MH	1.20	100		
HQBN-150L/A	2420209008	220V 50Hz	0.859	0.9	131 197 72	HPS/MH	1.80	150		
HQBG-175L/A	2420310001	220V 50Hz	0.960	0.9	131 197 72	MH	1.50	175		
HQBG-250L/A	2420312002	220V 50Hz	1.364	0.9	131 197 72	MH	2.13	250		