




HID照明电器箱体积小、性能优越、稳定、寿命长。配电箱是由极高品质的电器配件组合，产品出厂前经过严格的安全及性能检测。使用环境温度 $-25^{\circ}\text{C} \sim 50^{\circ}\text{C}$ ，外壳采用铝合金结构，具有IP65防护等级和散热功能，外壳上带有可维护的保险装置。有耐高温、高压的引线输出和具有较强耐温的电源引入线，使用方便、可靠。

Gearbox for outdoor lighting features:

- Excellent stable performance, long service life ;
- Assembled by high quality components and parts;
- Passed strict safety and performance tests before shipping;
- Operating temperature: $-25^{\circ}\text{C} \sim 50^{\circ}\text{C}$;
- Alloy casing structure, excellent IP65 and heat dissipation function ;
- Easy to maintain with fuse on case;
- Output leads with high heat and high voltage resistance, input leads for power supply with high heat resistance;
- Easy to use and reliable.

产品尺寸图
size

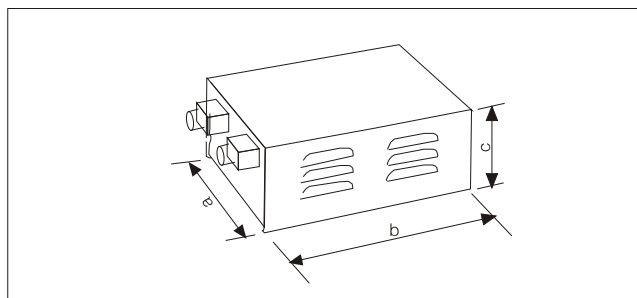

技术参数 data sheet

Ballast						Lamp				
型号 Model	产品代码 Code	电源电压 Supply voltage (V/Hz)	输入电流 input current (A)	功率因数 power factor $\cos \phi$	产品尺寸 Size(mm)			灯泡类型 bulb type	灯管电流(A) tube current	灯管功率(W) tube power
					a	b	c			
HQBN-35L-S3	2420202004	220V 50Hz	0.217	0.9	110	165	69	HPS/MH	0.53	35
HQBN-50L-S3	2420203002	220V 50Hz	0.298	0.9	110	165	69	HPS/MH	0.76	50
HQBN-70L-S3	2420204007	220V 50Hz	0.419	0.9	110	165	69	HPS/MH	0.98	70
HQBN-100L-S3	2420206001	220V 50Hz	0.576	0.9	110	165	69	HPS/MH	1.20	100
HQBN-150L-S3	2420209005	220V 50Hz	0.859	0.9	110	165	69	HPS/MH	1.80	150