


道路灯具系列 LD32 Road lighting series

产品特点 Material & Characteristic


- 产品标准：按照GB7000.5标准生产。已通过ISO9001国际质量体系认证。
- 灯体：灯具外型独特、新颖，上、下壳体采用高压铸铝一次成型，具有强度高表面质量好的优点，用进口颜料喷塑的表面色泽鲜艳、附着力强。
- 反光罩：CAD设计的反光罩配光合理，采用高纯度铝板拉伸成型，水压法工艺制造，经过氧化处理，具有极优的反光效果。
- 灯罩：弧形和平行透光罩采用5mm厚钢化玻璃加工成型，透光率高，耐冲击，防眩光。
- 固定装置：该产品特有的连接方式，开启自如，维护方便，锁紧可靠。
- 安装管径 $\Phi 48-60\text{mm}$ ，安装高度：8-12m。
- Product Standard: The product is manufactured according to the GB7000.5 standard and it has obtained ISO9001 International Quality System certificate.
- Body: The lighting fixture design is brand new and unique. The upper and lower shields are both shaped by high pressure die-cast aluminum with outer plastic-spurt coating. The surface is high intensive with good adhesive bright colors.
- Reflector: The CAD-designed reflector has suitable light distribution and it is shaped by high purity aluminum plate by hydrostatic pressure process and anodized treatment, which brings excellent reflection effect.
- Shield: The arc shape and parallel light transmission shield uses the 5mm thickness tempered glass with good light transmittance. It is shock resistant and anti-glare.
- Fixing Device: The special designed junction pattern is easy for opening and maintenance with reliable locking.
- Mounting tube diameter: $\Phi 48-60\text{mm}$. Mounting height: 8-12m.

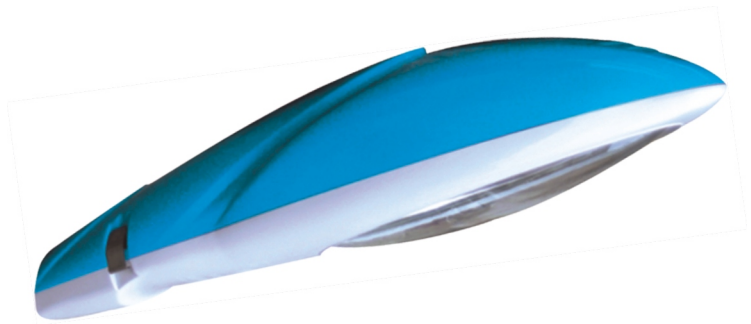



应用范围 Applications

道路、收费站、高架桥、停车场、广场等场所。
road, bridge, square, dock, parking lot, city district ect.

产品尺寸 size



配光曲线 Luminous intensity cure

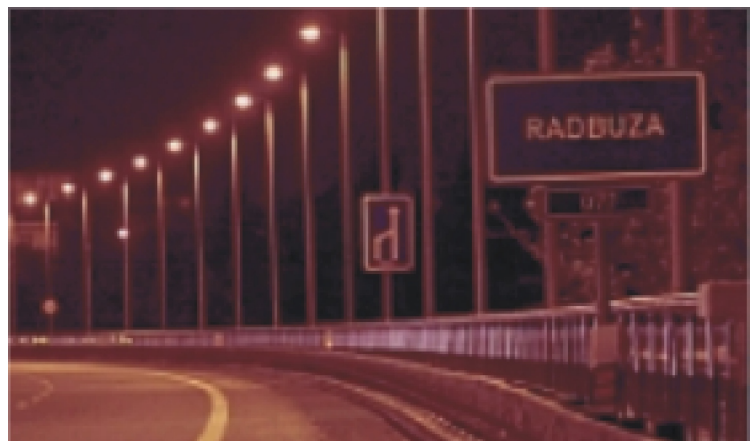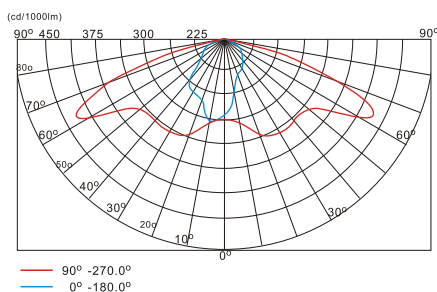

技术参数 Product Parameter

IP65

型号 Model	光源/灯功率 lamp	灯头 Base	电压/频率 Voltage & frequency
HQBN-150L/LD32	HPS 150W	E40	220V/50Hz
HQBN-250L/LD32	HPS 250W	E40	220V/50Hz
HQBN-400L/LD32	HPS 400W	E40	220V/50Hz