

埋地灯具系列 MD201 Embedment luminaire series

产品特点 Material & Characteristic

- 精密高压压铸铝灯体，6mm厚压铸铝面圈。
- 5mm厚强化玻璃，特制硅橡胶密封圈。
- I级电气绝缘保护。
- 较高的防水，防尘等级。
- Exat high pressure die-casting aluminum lamp body and surface gasket, the thickness of surface gasket is 6mm.
- 5mm strengthen glass, tailor-made hermetic loop of silicagel.
- Class I insulation.
- High class of waterproof and dustproof.



应用范围 Applications

林荫、道路、公园、广场、庭院、步行街等场所。

Path, road along river, park, square, courtyard, commercial area etc.



产品尺寸 size

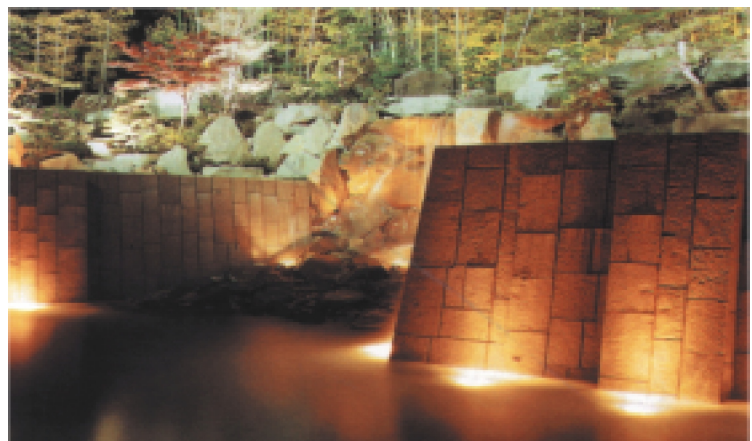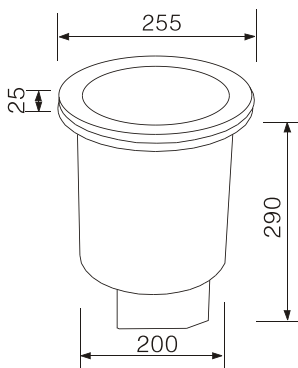

技术参数 Product Parameter

IP67

型号 Model	光源/灯功率 lamp	灯头 Base	电压/频率 Voltage & frequency
HQBN-35L/MD201	MH 35W	G12	220V/50Hz
HQBN-70L/MD201	MH 70W	G12/Rx7s	220V/50Hz
HQBN-150L/MD201	MH 150W	G12/Rx7s	220V/50Hz