

投光灯具系列 TG109 Projector luminaire series

产品特点 Material & Characteristic

- 高压压铸铝灯体，不锈钢防护网。
- 全新设计的椭圆形反射器，体积更小，重量更轻风阻更小，配光效果更好，效率更高。
- 内置遮光板，使投光光束集中，提高光线利用效率，并有效防止眩光和光污染。
- 背后开启式更换灯泡，方便维护，。
- 较高的防水，防尘等级。
- High pressure die-casting aluminum shape, stainless steel protective screening
- The newly designed elliptical reflector is more efficient as it is smaller and lighter with better drag of the air .
- The built-in shading plate is designed for narrow and midst light beam and effectively prevents glare and light pollution
- Light bulbs can be easily replaced in the back
- High waterproof and dust-proof coefficient




应用范围 Applications

- 建筑物、体育场、广场、码头、绿化照明、广告、大厦外景、车站、铁路、隧道、港口等户外照明。
- Buildings, stadiums, squares, docks, green lighting, advertising, building outlines, stations, railways, tunnels, ports and other outdoor lighting.




建议配套我司电器箱-K箱
It is recommended to use
Huaquan gear box model no.
HQBXXL-K

产品尺寸 size

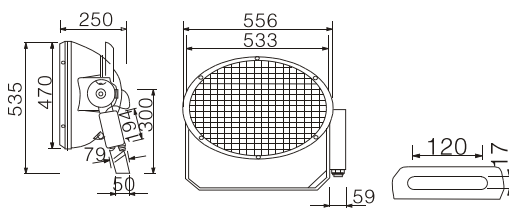

配光曲线 Luminous intensity curve

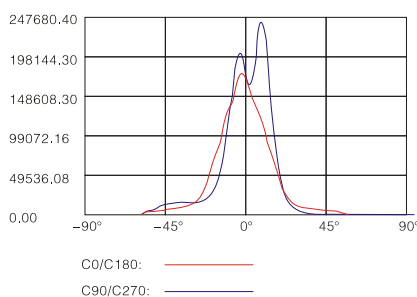

技术参数 Product Parameter

IP
65

型号 Model	光源/灯功率 lamp	灯头 Base	电压/频率 Voltage & frequency
HQBN-1800L/TG109	MH 1800W	PsSFC20-6/X528	220V/50Hz
HQBN-2000L/TG109	MH 2000W	PsSFC20-6/X528	220V/50Hz